

XL HYDRAULIC DETACHABLE GOOSENECK



XL 150 Hydraulic Detachable Gooseneck 3+3+3 beam deck

YOUR SOLUTIONS-BASED HAULING PARTNER



XL 2 Axle Booster

SUPERIOR VERSATILITY

7 position variable ride height makes hooking up to the truck easy. The **different axle configurations**, main deck widths, lengths and heights along with the ability to add a **booster**, provide superior versatility.



XL 120 HDE

BUILT TO LAST

XL hydraulic necks are **wider and stronger** than the industry standard, offering increased stability for high center of gravity loads. The hydraulic support arm contacts truck frame rails only; there is **no need to carry a 4 x 4** for blocking the neck.



XL 100 CHDE

PATENTED XL CHEATER NECK OPTION

The **Patented XL Cheater Neck** is a key component in many of XL Specialized Trailers' hydraulic units. The revolutionary design enables **trouble-free, efficient, fast hook-ups**. It boasts oversized donuts and tapered load pins for faster hook-ups on uneven ground.


BUILT WITH YOU IN MIND

- Strong hydraulic neck
- 12' 5" gooseneck length
- 24' main deck
- 7 position variable ride height for hooking up at various heights
- 40" rear deck height
- 16" king pin setting
- 50' 5" overall length
- 108" swing clearance
- Prepped for booster
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL HYDRAULIC DETACHABLE GOOSENECK

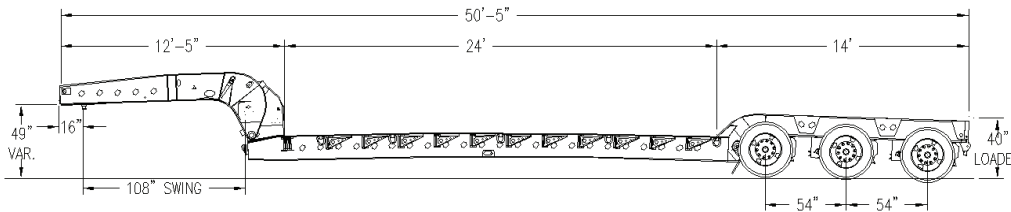

XL 110 HDG
CAPACITY: 110,000 LB OVERALL
CONCENTRATED: 110,000 LB IN 10'
OAL: 50' 5" | OAW: 102"

SPECS

GOOSENECK

HYDRAULIC DETACHABLE NARROW NECK
12' 5" LONG
APPROXIMATELY 35" TRAVEL UP/DOWN
7 POSITION VARIABLE RIDE HEIGHT
49" 5TH WHEEL HEIGHT
108" SWING CLEARANCE
16" KING PIN SETTING
HYDRAULICS RUN OFF OF WET KIT
AIR OPERATED LOCK W/ MANUAL
SAFETY LATCH

SUSPENSION

25,000 LB AIR RIDE
MANUAL RIDE HEIGHT CONTROL

AXLES

(3) 25,000 LB NOMINAL
54" SPACING
HUB PILOT, OUTBOARD DRUMS
NO ABS, 2 SPRING BRAKES
16½ X 7" BRAKES

WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5 TIRES

MAIN DECK

24' LONG
T-1 FLANGE, 80K WEB
24" LOADED DECK HEIGHT
8" GROUND CLEARANCE
(4) 16" FAB I-BEAMS
(5) BENT D-RINGS PER SIDE
10" AND 4" STUBBED JR. I-BEAM
CROSS MEMBERS ON 12" ALT. CTRS
1¾" APITONG DECKING RAISED
CENTER DECK OPEN
SWING OUT OUTRIGGERS WITH 24"
CENTERS, DOUBLE AT FRONT

REAR BRIDGE

14' LONG
40" LOADED DECK HEIGHT
OPEN WHEELS W/ BOLSTERS
OPEN BOOM TROUGH
(2) FLAG HOLDERS
(2) BENT D-RINGS IN TAIL CHANNEL
FRAME REINFORCEMENT FOR SINGLE
AXLE BOOSTER

LIGHTING

D.O.T. APPROVED 12V SEALED
GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER

NEW INDUSTRY-LEADING PAINT PROCESS

1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER PAINT

AVAILABLE MODELS

XL 70 HDG XL 100 HDG
XL 80 HDG XL 110 HDG
XL 90 HDG XL 120 HDG
ALL ALSO AVAILABLE WITH CHEATER
NECK, CHDG

OPTIONS



Removable swingout
outriggers



XL 2 Axle Power Booster

POPULAR OPTIONS

Full-width neck
Patented XL Cheater Neck
Detachable wheel area
13 HP Self-contained
power unit
Dual hydraulic system

Jeeps, Flip Axles, Boosters
Various outriggers/D-rings
Covered boom trough
Upper flange reinforcement
Steel fenders for gooseneck
Many more available